




SERIES 70

Catalog #		Type
Project		
Description		Date

HANGING

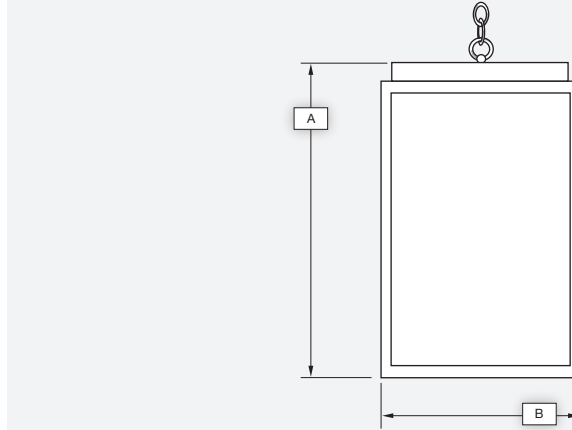

Select Strap Design:
AA, BB, CC, DD, EE, FF, GG, HH, II

Standard Features

Material

Paintlok sheet; Standard Powdercoat Finish, White Acrylic Lens; .125 thickness, ETL Damp Location.

Installation

Mounting/wireway hole in center of canopy. Supplied with standard mounting hardware to mount to a 4" J-box or plaster ring.

Optics*

Contact Evergreen Lighting for complete photometrics.

LED Features

LED

Alta LED #AL-R-1W-30LED array to be mounted onto an Aluminum MPCB Board configured to the proper wattage. The LED arrays will be centered within the Lens area and mounted on a white aluminum reflective plate.

Driver

Specific Drivers will be matched with each different LED array configuration/wattage. Standard Driver Features:

- Constant Current
- 3 / 5 year warranty
- 120/277 multi-voltage power supplies
- Kelvin - 2700K, 3000K, 3500K, 4100K, 5000K

Fluorescent Features

Ballast

SC programmed electronic high power factor ballast, multivoltage 120V/277V. Lamps not included

Finishes

Ballast

Architectural Bronze (AB)	Textured Gold (TG)
Textured Bronze (TBR)	Metallic Nickel (MN)
Matte Black (MBK)	Textured Verde Patina (TVP)
Semi Gloss Black (GBK)	Satin Brass (SB)
Textured Black (TBK)	Copper Vein (CV)
Textured Rust (TR)	Gold Vein (GV)
Matte White (MW)	Silver Vein (SV)
Textured White (TW)	Chrome (CH)
Gloss White (GW)	Oil Rubbed Bronze (ORB)
Metallic Grey (MG)	

Options*

Emergency (EMR)	Special Lens
Photocell (PC)	Incandescent
Lamp Sources	
Size Modifications	
Vandal Proof Enclosure (VPE)	

Sample Spec Number: 703203Q-AB-A-AA

Part #	Lamp/Watts	Lumens	A	B	C
703203Q	13Q	800	13	8 1/2	
703205T	26T	1800	13	8 1/2	
703204Q	2-13Q	1600	13	8 1/2	
703205	26Q	1800	13	8 1/2	
703311	32T	2200	16	10	
703304Q	2-13Q	1600	16	10	
703306	2-26Q	3600	16	10	
703322	42T	3200	16	10	
703206L	6LED	600	13	8 1/2	
703210L	10LED	1000	13	8 1/2	
703212L	12LED	1200	13	8 1/2	
703320L	20LED	2000	16	10	
703324L	24LED	2400	16	10	
703340L	40LED	4000	16	10	
DARK SKY					
703209LS	9LED	900	13	8 1/2	
703215LS	15LED	1500	13	8 1/2	
703320LS	20LED	2000	16	10	

