



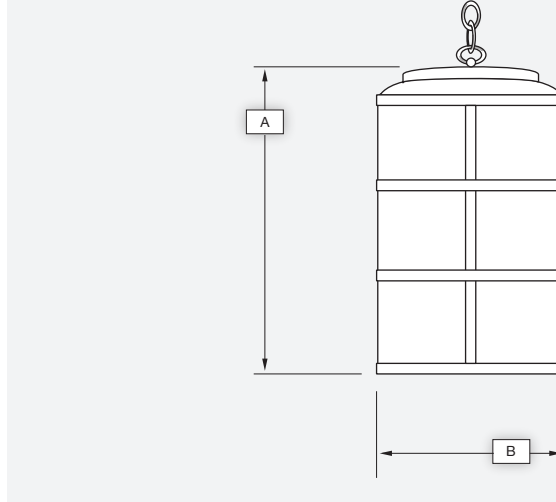

NAPLES

Catalog #		Type
Project		
Description		Date

HANGING

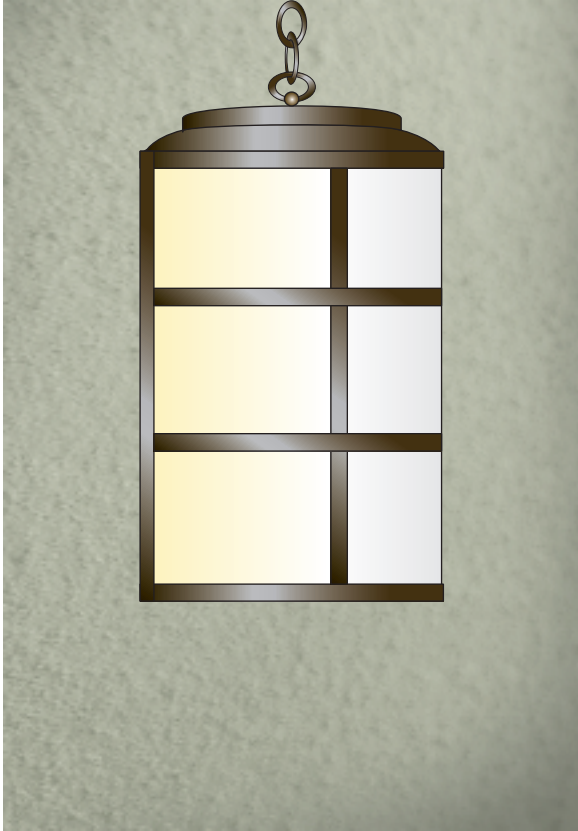

Standard Features

Material

Paintlok sheet; Standard Powdercoat Finish, White Acrylic Lens; .125 thickness, ETL Damp Location.

Installation

Mounting/wireway hole in center of canopy. Supplied with standard mounting hardware to mount to a 4" J-box or plaster ring.

Optics*

Contact Evergreen Lighting for complete photometrics.

LED Features

LED

Alta LED #AL-R-1W-30LED array to be mounted onto an Aluminum MPCB Board configured to the proper wattage. The LED arrays will be centered within the Lens area and mounted on a white aluminum reflective plate.

Driver

Specific Drivers will be matched with each different LED array configuration/wattage. Standard Driver Features:

- Constant Current
- 3 / 5 year warranty
- 120/277 multi-voltage power supplies
- Kelvin - 2700K, 3000K, 3500K, 4100K, 5000K

Fluorescent Features

Ballast

SC programmed electronic high power factor ballast, multivoltage 120V/277V. Lamps not included

Finishes

Ballast

Architectural Bronze (AB)	Textured Gold (TG)
Textured Bronze (TBR)	Metallic Nickel (MN)
Matte Black (MBK)	Textured Verde Patina (TVP)
Semi Gloss Black (GBK)	Satin Brass (SB)
Textured Black (TBK)	Copper Vein (CV)
Textured Rust (TR)	Gold Vein (GV)
Matte White (MW)	Silver Vein (SV)
Textured White (TW)	Chrome (CH)
Gloss White (GW)	Oil Rubbed Bronze (ORB)
Metallic Grey (MG)	

Options*

Emergency (EMR)	Special Lens
Photocell (PC)	Incandescent
Lamp Sources	
Size Modifications	
Vandal Proof Enclosure (VPE)	

Sample Spec Number: NAP3203Q-AB-A

Part #	Lamp/Watts	Lumens	A	B	C
NAP3203Q	13Q	800	12 1/2	7 3/4	
NAP3205T	26T	1800	12 1/2	7 3/4	
NAP3204Q	2-13Q	1600	12 1/2	7 3/4	
NAP3205	26Q	1800	12 1/2	7 3/4	
NAP3311	32T	2200	15	9	
NAP3304Q	2-13Q	1600	15	9	
NAP3306	2-26Q	3600	15	9	
NAP3322	42T	3200	15	9	
NAP3206L	6LED	600	12 1/2	7 3/4	
NAP3210L	10LED	1000	12 1/2	7 3/4	
NAP3212L	12LED	1200	12 1/2	7 3/4	
NAP3320L	20LED	2000	15	9	
NAP3324L	24LED	2400	15	9	
NAP3340L	40LED	4000	15	9	
DARK SKY					
NAP3209LS	9LED	900	12 1/2	7 3/4	
NAP3215LS	15LED	1500	12 1/2	7 3/4	
NAP3320LS	20LED	2000	15	9	

