




# SERIES 90

Catalog #		Type
Project		
Description		Date

## ARM MOUNT

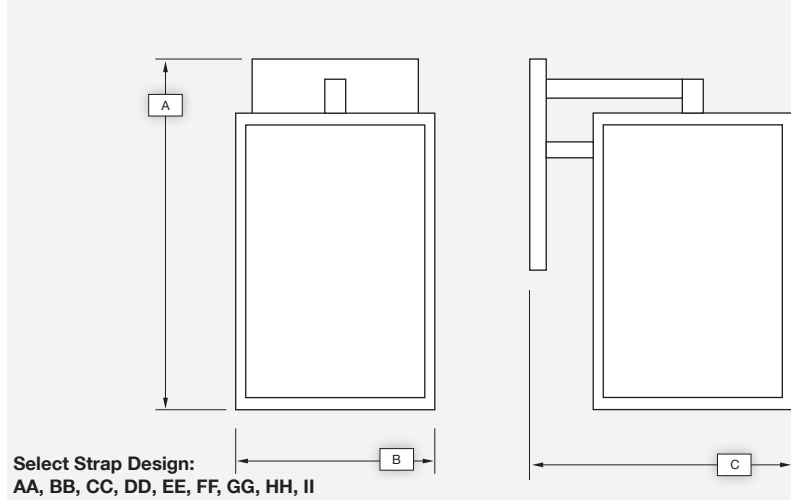

Select Strap Design:  
AA, BB, CC, DD, EE, FF, GG, HH, II

### Standard Features

#### Material

Paintlok sheet; Standard Powdercoat Finish, White Acrylic Lens; .125 thickness, ETL Wet Location.

#### Installation

Mounting/wireway hole in center of backplate. Supplied with standard mounting hardware to mount to a 4" J-box or plaster ring.

#### Optics\*

Contact Evergreen Lighting for complete photometrics.

### LED Features

#### LED

Alta LED #AL-R-1W-30LED array to be mounted onto an Aluminum MPCB Board configured to the proper wattage. The LED arrays will be centered within the Lens area and mounted on a white aluminum reflective plate.

#### Driver

Specific Drivers will be matched with each different LED array configuration/wattage. Standard Driver Features:

- Constant Current
- 3 / 5 year warranty
- 120/277 multi-voltage power supplies
- Kelvin - 2700K, 3000K, 3500K, 4100K, 5000K

### Fluorescent Features

#### Ballast

SC programmed electronic high power factor ballast, multivoltage 120V/277V. Lamps not included

### Finishes

#### Ballast

Architectural Bronze (AB)	Textured Gold (TG)
Textured Bronze (TBR)	Metallic Nickel (MN)
Matte Black (MBK)	Textured Verde Patina (TVP)
Semi Gloss Black (GBK)	Satin Brass (SB)
Textured Black (TBK)	Copper Vein (CV)
Textured Rust (TR)	Gold Vein (GV)
Matte White (MW)	Silver Vein (SV)
Textured White (TW)	Chrome (CH)
Gloss White (GW)	Oil Rubbed Bronze (ORB)
Metallic Grey (MG)	

### Options\*

Emergency (EMR)	Special Lens
Photocell (PC)	Incandescent
Lamp Sources	
Size Modifications	
Vandal Proof Enclosure (VPE)	

Sample Spec Number: 902103Q-AB-A-DD

Part #	Lamp/Watts	Lumens	A	B	C
902103Q	13Q	800	12 1/2	5 3/4	7 1/4
902105T	26T	1800	12 1/2	5 3/4	7 1/4
902104Q	2-13Q	1600	12 1/2	5 3/4	7 1/4
902105	26Q	1800	12 1/2	5 3/4	7 1/4
902211	32T	2200	14	7	8 1/2
902204Q	2-13Q	1600	14	7	8 1/2
902206	2-26Q	3600	14	7	8 1/2
902322	42T	3200	14	7	8 1/2
902106L	6LED	600	12 1/2	5 3/4	7 1/4
902110L	10LED	1000	12 1/2	5 3/4	7 1/4
902112L	12LED	1200	12 1/2	5 3/4	7 1/4
902220L	20LED	2000	14	7	8 1/2
902224L	24LED	2400	14	7	8 1/2
902240L	40LED	4000	14	7	8 1/2
<b>DARK SKY</b>					
902109LS	9LED	900	12 1/2	5 3/4	7 1/4
902115LS	15LED	1500	12 1/2	5 3/4	7 1/4
902220LS	20LED	2000	14	7	8 1/2

