


# SICILY

Catalog #		Type
Project		
Description		Date

## HANGING

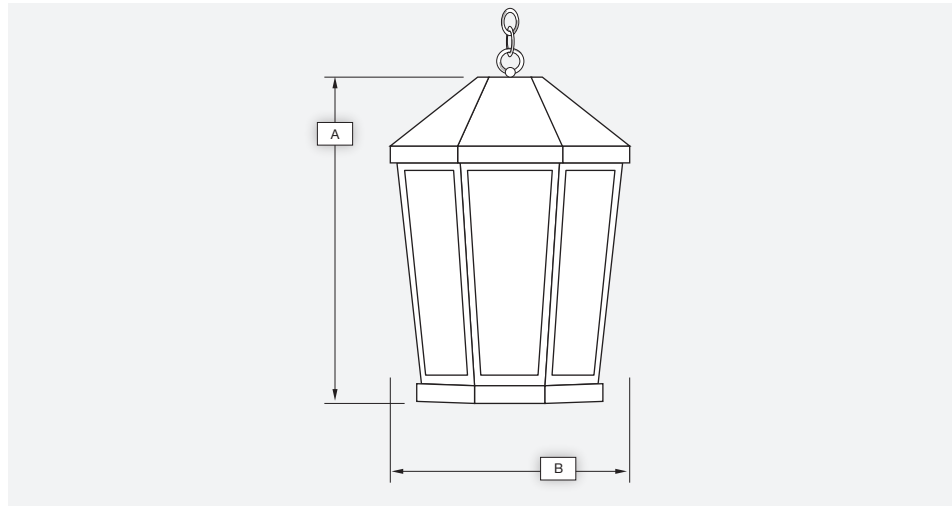

### Standard Features

#### Material

Paintlok sheet; Standard Powdercoat Finish, White Acrylic Lens; .125 thickness, ETL Damp Location.

#### Installation

Mounting/wireway hole in center of canopy. Supplied with standard mounting hardware to mount to a 4" J-box or plaster ring.

#### Optics\*

Contact Evergreen Lighting for complete photometrics.

### LED Features

#### LED

Alta LED #AL-R-1W-30LED array to be mounted onto an Aluminum MPCB Board configured to the proper wattage. The LED arrays will be centered within the Lens area and mounted on a white aluminum reflective plate.

#### Driver

Specific Drivers will be matched with each different LED array configuration/wattage. Standard Driver Features:

- Constant Current
- 3 / 5 year warranty
- 120/277 multi-voltage power supplies
- Kelvin - 2700K, 3000K, 3500K, 4100K, 5000K

### Fluorescent Features

#### Ballast

SC programmed electronic high power factor ballast, multivoltage 120V/277V. Lamps not included

### Finishes

#### Ballast

Architectural Bronze (AB)	Textured Gold (TG)
Textured Bronze (TBR)	Metallic Nickel (MN)
Matte Black (MBK)	Textured Verde Patina (TVP)
Semi Gloss Black (GBK)	Satin Brass (SB)
Textured Black (TBK)	Copper Vein (CV)
Textured Rust (TR)	Gold Vein (GV)
Matte White (MW)	Silver Vein (SV)
Textured White (TW)	Chrome (CH)
Gloss White (GW)	Oil Rubbed Bronze (ORB)
Metallic Grey (MG)	

#### Options\*

Emergency (EMR)	Special Lens
Photocell (PC)	Incandescent
Lamp Sources	
Size Modifications	
Vandal Proof Enclosure (VPE)	

Sample Spec Number: SIC3203Q-AB-A

Part #	Lamp/Watts	Lumens	A	B	C
SIC3203Q	13Q	800	16	12	
SIC3205T	26T	1800	16	12	
SIC3204Q	2-13Q	1600	16	12	
SIC3205	26Q	1800	16	12	
SIC3311	32T	2200	20	14	
SIC3304Q	2-13Q	1600	20	14	
SIC3306	2-26Q	3600	20	14	
SIC3322	42T	3200	20	14	
SIC3206L	6LED	600	16	12	
SIC3210L	10LED	1000	16	12	
SIC3212L	12LED	1200	16	12	
SIC3320L	20LED	2000	20	14	
SIC3324L	24LED	2400	20	14	
SIC3340L	40LED	4000	20	14	
<b>DARK SKY</b>					
SIC3209LS	9LED	900	16	12	
SIC3215LS	15LED	1500	16	12	
SIC3320LS	20LED	2000	20	14	

