

TAHOE LED SERIES

Tahoe LED Exterior Quartersphere Wall Sconce, DarkSky, features a Spun Aluminum Housing with Luminous Bottom Lens, great application for shopping centers, cities, and multi family housing projects

DARK SKY

EVERGREEN LIGHTING

Catalog #		Type
Project		
Comments		Date
Prepared By		

SPECIFICATION FEATURES

Material

16 Gauge Aluminum Spun construction for high quality appearance in a Quartersphere Design, standard powdercoat finish, clear frosted acrylic flat panel lens, .125 thick

Installation

Supplied with standard mounting hardware to mount to a 4" J-box or plaster ring

Optics

Contact Evergreen Lighting for complete photometrics.

LED


Alta #AL-R-1W-30 LED array to be mounted onto an Aluminum MPCB Board configured to the proper wattage. The LED arrays will be centered within the Lens area and mounted on a white aluminum reflective backplate.

Driver

Specific Drivers will be matched with each different LED array configuration/wattage. Standard Driver features are:

- Constant Current
- 5 year warranty
- 120/277 multi-voltage power supplies
- IP66, IP67

Driver Options:
0-10V Dimming
Phase Dimming
Triac Dimming

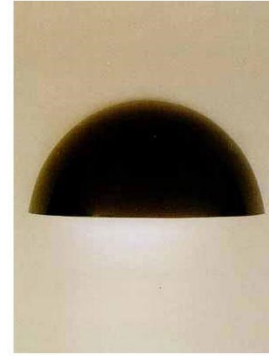

6"H X 12"W X 6"D
7 1/2"H X 15"W X 8 1/2"D
9 1/2"H X 19"W X 10 1/2"D

Tahoe Series

Labels
ETL for US and
Canada for wet loca-
tion

ORDERING INFORMATION

Sample Number: TA-W-15-24W-AB-CFA

Series TA	Style Wall	Size 12" 15" 19"	LED 12" 6W 12W 15" 12W 24W 19" 36W 54W	Finish Architectural Bronze (AB) Textured Bronze (TBR) Matte Black (MBK) Semi Gloss Black (GBK) Textured Black (TBK) Textured Rust (TR) Matte White (MW) Textured White (TW) Gloss White (GW) Metallic Grey (MG) Textured Gold (TG) Metallic Nickel (MN) Textured Verde Patina (TVP) Satin Brass (SB) Copper Vein (CV) Gold Vein (GV) Silver Vein (SV) Polished Brass (PB) Adder Chrome (CH)	Lens White Acrylic (A) Clear Frosted Acrylic (CFA) White Frosted (WF) White Alabaster (WA) Honey Onyx (HO) Natural Horn (NH) Beige Alabaster (BA) Honey Swirl (HS) Clear Frosted Glass (CFG)	Options EMR, 700 Lumen EMR, 900 Lumen Dimming Drivers Design Modifications
	LED to CFL Lamp 6W = (1) F13DBX 12W = (2) F13DBX (1)F26DBX 24W = (2)F26DBX (2)F32TBX 36W = (2)F42TBX = (1) 70 MH 54W = (1) 100 MH					

Evergreen Lighting
www.evergreenlighting.com