




## SULLY BOLLARD SERIES

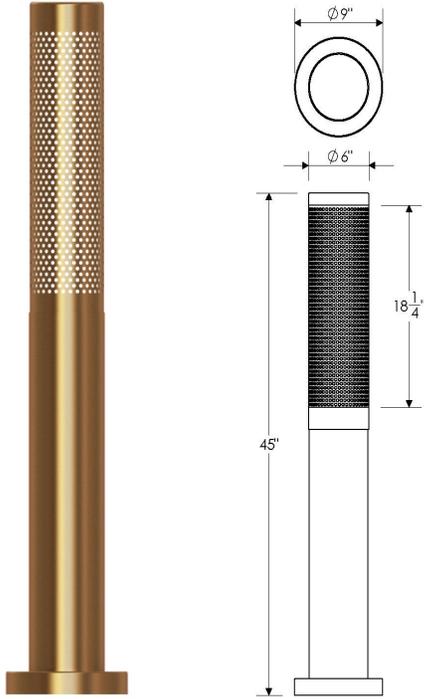

DIMENSIONS: 45"H X 6"W

|             |  |             |
|-------------|--|-------------|
| Catalog #   |  | Type        |
| Project     |  | LED BOLLARD |
| Comments    |  |             |
| Prepared By |  | Date        |

### SPECIFICATIONS

#### Material

All parts are durable Aluminum Extruded Tube with .080 Spun aluminum Roof Cap, 360 Degree Perforated Shield, with supports fabricated for maximum strength.

#### Lens

Standard White Frosted Premium Acrylic or Clear Frosted Premium Acrylic

#### LED

ALTA Long Life, high-efficiency, surface mount LEDs mounted on MPCB Aluminum Boards

#### Lifespan:

100,000 hour LED lifespan based on IES LM-80 results and TM-21 calculations

#### Driver




0-10V Dimming Driver for 120/277 volt, Constant Current, metal case, 5 year warranty

#### Label

ETL Listed for US and Canada for

### ORDERING INFORMATION

Sample Number: SUL-B-45-48W-AB-WF


|   |   |   |   |  |   |   |
|---|---|---|---|--|---|---|
|  |  |  |  |   |   |  |
| <b>Series</b><br>SUL  | <b>Style</b><br>Bollard   | <b>Size</b><br>36"<br>45"   | <b>Lamp</b><br>36"<br>24W<br>48W<br><br>45"<br>24W<br>48W                           | <b>Finish</b><br>Architectural Bronze (AB)<br>Textured Bronze (TBR)<br>Matte Black (MBK)<br>Semi Gloss Black (GBK)<br>Textured Black (TBK)<br>Textured Rust (TR)<br>Matte White (MW)<br>Textured White (TW)<br>Gloss White (GW)<br>Metallic Grey (MG)<br>Brushed Aluminum (BA) adder<br>Metallic Nickel (MN)<br>Textured Verde Patina (TVP)<br>Satin Brass (SB)<br>Copper Vein (CV)<br>Gold Vein (GV)<br>Silver Vein (SV)<br>Chrome (CH) | <b>Standard Lens</b><br>White Frosted (WF)<br>Clear Frosted (CFA)<br><br><b>Optional Lens</b><br>White Alabaster (WA)<br>Honey Onyx (HO)<br>Natural Horn (NH)<br>Beige Alabaster (BA)<br>Honey Swirl (HS) | <b>Options</b><br>LED EMR - Up to 24W<br>OCC Sensors<br>Photo Cell Control            |
| <b>DELIVERED LUMENS PER WATT</b>  |   |   |   |  |   |   |
| 2700K = 80  |   |   |   |  |   |   |
| 3000K = 90  |   |   |   |  |   |   |
| 3500K = 100   |   |   |   |  |   |   |
| 4100K = 110   |   |   |   |  |   |   |
| 5000K = 120   |   |   |   |  |   |   |
| Evergreen Lighting<br>www.evergreenlighting.com                                     |   |   |   |  |   |   |



## SULLY BOLLARD SERIES

### Instruction Sheet

#### Mounting Template

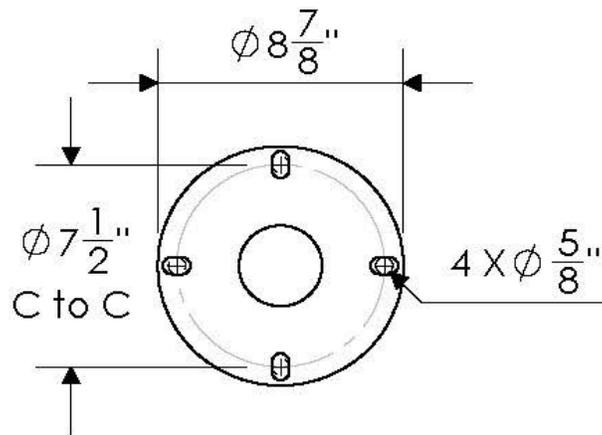

#### Mounting

Standard anchor bolts are  $\frac{3}{8}$ " X 12" X 3". Bolts, nuts, and washers shall be hot dipped galvanized steel.

**Warranty:** Evergreen Lighting warrants Bollard LED products sold by Evergreen Lighting to be free from defects in material and workmanship for a period of One year for metal parts, a period of five 5 years for exterior housing powdercoat finish, a period of five 5 years for LED Light Engines and, a period of five 5 years for LED power components (driver), from the date of sale of such goods to the buyer as specified in Evergreen Lighting shipment documents for each product.



**EVERGREEN  
LIGHTING**


**SULLY BOLLARD SERIES**

Photometrics

**SUL-B-24W**

**SUL-B-48W**


LUMINAIRE CLASSIFICATION SYSTEM (LCS) GRAPH

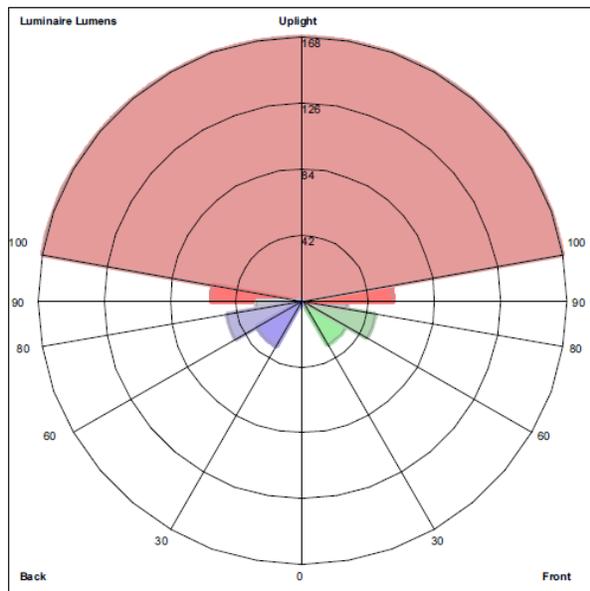

Luminaire Lumens:  
Front: Low=2.1, Medium=32.2, High=47.1, Very High=28.3  
Back: Low=2.2, Medium=33.1, High=48.4, Very High=29.2  
Uplight: Low=57.6, High=167.7

BUG Rating : B0-U3-G1

LUMINAIRE CLASSIFICATION SYSTEM (LCS) GRAPH

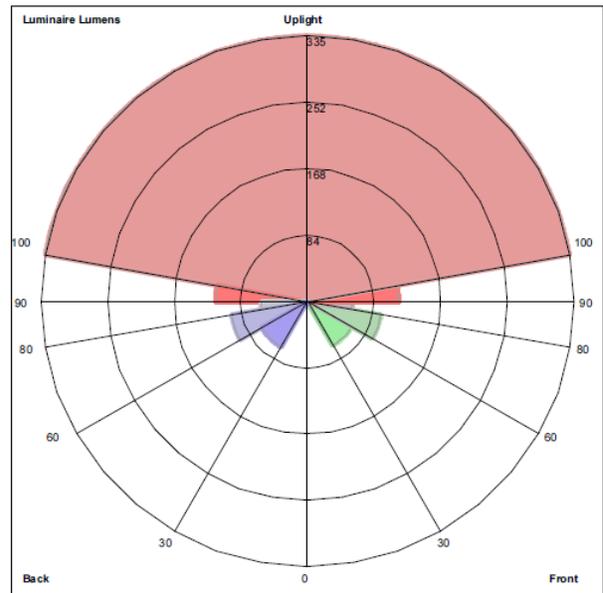

Luminaire Lumens:  
Front: Low=4.2, Medium=64.3, High=94.2, Very High=56.6  
Back: Low=4.4, Medium=66.3, High=96.9, Very High=58.5  
Uplight: Low=115.2, High=335.4

BUG Rating : B0-U3-G1

Evergreen Lighting  
[www.evergreenlighting.com](http://www.evergreenlighting.com)

