




BALDWIN BOLLARD SERIES

| | | |
|-------------|--|----------------|
| Catalog # | | Type |
| Project | | LED BOLLARD |
| Comments | | |
| Prepared By | | Date |

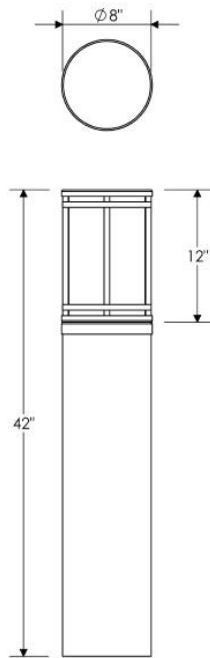

36" high x 8" diameter

SPECIFICATIONS

Material

All parts are durable Aluminum Extruded Tube with .080 Spun aluminum Roof with Square Solid Aluminum Bar design fabricated for maximum strength.

Lens

Standard White Frosted Premium Acrylic or Clear Frosted Premium Acrylic

LED

Alta #AL -R-1W Series mounted onto an Aluminum MPCB Round Puck Board configured to the proper wattage.

Driver

0-10V Dimming Driver for 120/277 volt, Constant Current, metal case, 5 year warranty

Label

ETL Listed for US and Canada for Wet Location

BAL-B-36-18W-TBR-CFA-12V-TP5-30K

Type SH

36" high Baldwin Bollard with 18 watts of LED- 3,000 Kelvin - 1,800 lumens with type 5 light distribution

Textured Bronze Powdercoat finish
Clear Frosted acrylic

With interior anchor bolt kit and bolts included

12 volt