




SERIES 80

Catalog #		Type
Project		
Description		Date

ARM MOUNT

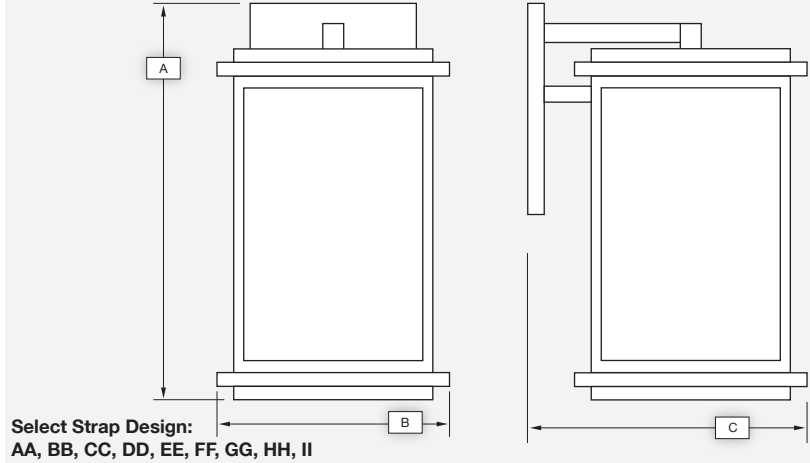

Standard Features

Material

Paintlok sheet; Standard Powdercoat Finish, White Acrylic Lens; .125 thickness, ETL Wet Location.

Installation

Mounting/wireway hole in center of backplate. Supplied with standard mounting hardware to mount to a 4" J-box or plaster ring.

Optics*

Contact Evergreen Lighting for complete photometrics.

LED Features

LED

Alta LED #AL-R-1W-30LED array to be mounted onto an Aluminum MPCB Board configured to the proper wattage. The LED arrays will be centered within the Lens area and mounted on a white aluminum reflective plate.

Driver

Specific Drivers will be matched with each different LED array configuration/wattage. Standard Driver Features:

- Constant Current
- 3 / 5 year warranty
- 120/277 multi-voltage power supplies
- Kelvin - 2700K, 3000K, 3500K, 4100K, 5000K

Fluorescent Features

Ballast

SC programmed electronic high power factor ballast, multivoltage 120V/277V. Lamps not included

Finishes

Ballast

Architectural Bronze (AB)	Textured Gold (TG)
Textured Bronze (TBR)	Metallic Nickel (MN)
Matte Black (MBK)	Textured Verde Patina (TVP)
Semi Gloss Black (GBK)	Satin Brass (SB)
Textured Black (TBK)	Copper Vein (CV)
Textured Rust (TR)	Gold Vein (GV)
Matte White (MW)	Silver Vein (SV)
Textured White (TW)	Chrome (CH)
Gloss White (GW)	Oil Rubbed Bronze (ORB)
Metallic Grey (MG)	

Options*

Emergency (EMR)	Special Lens
Photocell (PC)	Incandescent
Lamp Sources	
Size Modifications	
Vandal Proof Enclosure (VPE)	

Sample Spec Number: 802203Q-AB-A-AA

Part #	Lamp/Watts	Lumens	A	B	C
802203Q	13Q	800	13 3/4	7	8 1/2
802205T	26T	1800	13 3/4	7	8 1/2
802204Q	2-13Q	1600	13 3/4	7	8 1/2
802205	26Q	1800	13 3/4	7	8 1/2
802311	32T	2200	15	8	9 1/2
802304Q	2-13Q	1600	15	8	9 1/2
802306	2-26Q	3600	15	8	9 1/2
802322	42T	3200	15	8	9 1/2
802206L	6LED	600	13 3/4	7	8 1/2
802210L	10LED	1000	13 3/4	7	8 1/2
802212L	12LED	1200	13 3/4	7	8 1/2
802320L	20LED	2000	15	8	9 1/2
802324L	24LED	2400	15	8	9 1/2
802340L	40LED	4000	15	8	9 1/2
DARK SKY					
802209LS	9LED	900	13 3/4	7	8 1/2
802215LS	15LED	1500	13 3/4	7	8 1/2
802320LS	20LED	2000	15	8	9 1/2

