EVEREST LED CEILING SERIES

Everest LED Flush Round Ceiling Fixture features a Two Piece Spinning Trim Design, a drop acrylic bowl, and displays a clean contemporary design

Catalog #	Туре
Project	
Comments	Date
Prepared By	

EVERGREEN LIGHTING

SPECIFICATION FEATURES

Material

Paintlok Non-Rustable Steel construction spun for high quality appearance, standard powdercoat finish, P95 white smooth acrylic bowl lens, .125 thick.

Installation

Supplied with standard mounting hardware to mount to a 4" J-box or plaster ring

Optics

Contact Evergreen Lighting for complete photometrics.

LED

Alta #AL-R-1W-30 LED array to be mounted onto an Aluminum MPCB Board configured to the proper watt-

The LED arrays will be centered within the Lens area and mounted on a white aluminum reflective backplate.

Driver

Specific Drivers will be matched with each different LED array configuration/ wattage. Standard Driver features are:

- **Constant Current**
- 5 year warranty
- 120/277 multi-voltage power supplies
- IP66, IP67




13" Diameter X 4" Deep 15" Diameter X 5" Deep 19" Diameter X 6" Deep

Everest Series

Labels ETL for US and Canada for damp location

ORDERING INFORMATION

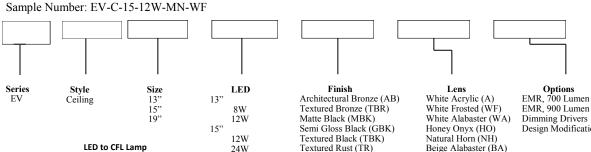

24W

24W

48W

Evergreen Lighting www.evergreenlighting.com

8W = (1) F18DBX

12W = (2) F13DBX

24W = (2)F26DBX

48W = (4)F26DBX

(1)F26DBX

(2)F42TBX

Textured Black (TBK) Textured Rust (TR) Matte White (MW) Textured White (TW) Gloss White (GW) Metallic Grey (MG) Textured Gold (TG) Metallic Nickel (MN) Textured Verde Patina (TVP) Satin Brass (SB) Copper Vein (CV) Gold Vein (GV) Silver Vein (SV) Polished Brass (PB) Adder Chrome (CH)

EMR, 900 Lumen Dimming Drivers Design Modifications Beige Alabaster (BA)

Honey Swirl (HS)