# **GLENRIDGE LED SERIES**

Glenridge LED Wall Sconce features a Luminous Diffuser in Acrylic, Commercial Milled Square Bar Design, ADA Compliant

Catalog #	Туре
Project	
Comments	Date
Prepared By	

# **EVERGREEN LIGHTING**

### SPECIFICATION FEATURES

### Material

Aluminum Square Bar construction slotted and milled for high quality appearance, standard powdercoat finish, P95 white frosted acrylic half cylinder lens, .125 thick, top and bottom lens.

#### Installation

Supplied with standard mounting hardware to mount to a 4" J-box or plaster ring

### **Optics**

Evergreen Lighting Website for complete photometrics.

# **LED**

Alta #AL-R-1W-30 LED array to be mounted onto an Aluminum MPCB Board configured to the proper watt-

The LED arrays will be centered within the Lens area and mounted on a decorative white aluminum reflective plate.

#### Driver

Specific Drivers will be matched with each different LED array configuration/ wattage. Standard Driver features are:

- **Constant Current**
- 3 or 5 year warranty
- 120/277 multi-voltage power supplies
- IP66, IP67



15"H X 7"W X 4"D 19"H X 9"W X 5 1/2"D 24"H X 10"W X 5 1/2"D

# **Glenridge Series**

DELIVERED LUMENS PER WATT

2700K = 80


3000K = 90

3500K = 100

4100K = 1105000K = 120

### ORDERING INFORMATION

Sample Number: GLE-W-24W-MN-WF

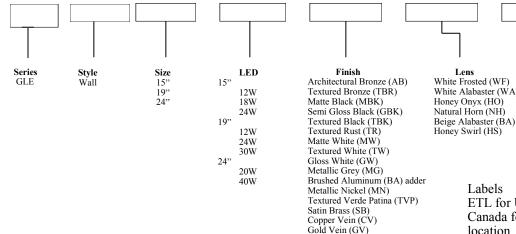

Silver Vein (SV) Chrome (CH)

**Evergreen Lighting** www.evergreenlighting.com White Frosted (WF) White Alabaster (WA) Honey Onyx (HO) Natural Horn (NH)

Options EMR, 650 Lumen EMR, 900 Lumen Dimming Drivers Design Modifications Larger size in ADA

Labels ETL for US and Canada for WET location