HARVARD LED SERIES

Harvard LED Wall Sconce features a Luminous Diffuser in Acrylic, Commercial Milled Square Bar Design, ADA Compliant

EVERGREEN LIGHTING

SPECIFICATION FEATURES

Material

Aluminum Square Bar construction slotted and milled for high quality appearance, standard powdercoat finish, P95 white frosted acrylic half cylinder lens, .125 thick, top and bottom lens.

Installation

Supplied with standard mounting hardware to mount to a 4" J-box or plaster ring

Optics

Evergreen Lighting Website for complete photometrics.

LED


Alta #AL-R-1W-30 LED array to be mounted onto an Aluminum MPCB Board configured to the proper wattage.

The LED arrays will be centered within the Lens area and mounted on a decorative white aluminum reflective plate.

Driver

Specific Drivers will be matched with each different LED array configuration/ wattage. Standard Driver features are:

- Constant Current
- 3 or 5 year warranty
- 120/277 multi-voltage power supplies
- IP66, IP67






15"H X 7"W X 4"D 19"H X 9"W X 5 1/2"D 24"H X 10"W X 5 1/2"D

Harvard Series

DELIVERED LUMENS PER WATT

2700K = 80 3000K = 90 3500K = 100 4100K = 110 5000K = 120

ORDERING INFORMATION

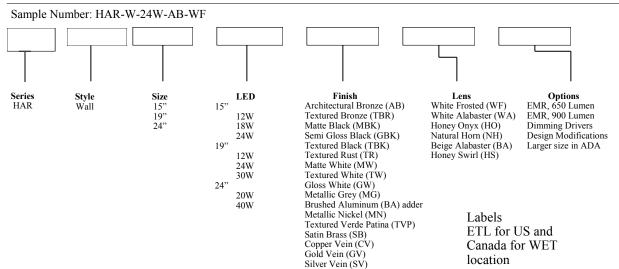

Chrome (CH)

Evergreen Lighting www.evergreenlighting.com