HOOVER LED SERIES

Hoover LED Wall Sconce features a Luminous Diffuser in Acrylic, Sheet Metal Construction with Modern Decorative V Shaped Design, ADA Compliant

	Catalog #	Туре
d	Project	
	Comments	Date
	Prepared By	

SPECIFICATION FEATURES

Material

Paintlok Non Rustable Steel construction spot welded for high quality appearance in a sleek V Shaped Design, standard powdercoat finish, white smooth acrylic formed V shaped lens, .125 thick, with open top and bottom.

Option: Wet Location with top and bottom lens or solid metal top cap.

Installation

Supplied with standard mounting hardware to mount to a 4" J-box or plaster ring

Optics

Contact Evergreen Lighting for complete photometrics.

LED

Alta #AL-R-1W-30 LED array to be mounted onto an Aluminum MPCB Board configured to the proper wattage.

The LED arrays will be centered within the Lens area and mounted on a white aluminum reflective backplate.

Driver

Specific Drivers will be matched with each different LED array configuration/wattage. Standard Driver features are:

- Constant Current
- 5 year warranty
- 120/277 multi-voltage power supplies
- IP66, IP67

Driver Options: 0-10V Dimming Phase Dimming Triac Dimming




11"H X 7"W X 4"D 13"H X 7 1/2"W X 4"D 18"H X 11"W X 5"D

Hoover Series

Labels ETL for US and Canada for damp or wet location

ORDERING INFORMATION

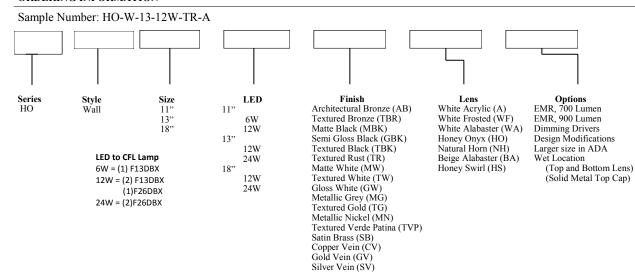

Polished Brass (PB) Adder

Chrome (CH)

Evergreen Lighting www.evergreenlighting.com