POWELL LED SERIES

Powell LED Wall Sconce features a Luminous Diffuser in Acrylic, Commercial Milled Flat Bar Design, ADA Compliant

Catalog #	Туре
D	
Project	
Comments	Date
Prepared By	

EVERGREEN LIGHTING

SPECIFICATION FEATURES

Material

Aluminum Flat Bar construction slotted and milled for high quality appearance, standard powder-coat finish, P95 white frosted acrylic half cylinder lens, .125 thick, top and bottom lens or solid metal top.

Installation

Supplied with standard mounting hardware to mount to a 4" J-box or plaster ring

Optics

Evergreen Lighting Website for complete photometrics.

LED

Alta #AL-R-1W-30 LED array to be mounted onto an Aluminum MPCB Board configured to the proper wattage.

The LED arrays will be centered within the Lens area and mounted on a decorative white aluminum reflective plate.

Driver

Specific Drivers will be matched with each different LED array configuration/wattage. Standard Driver features are:

- Constant Current
- 3 or 5 year warranty
- 120/277 multi-voltage power supplies
- IP66, IP67



15"H X 7"W X 4"D 19"H X 9"W X 5 1/2"D 24"H X 10"W X 5 1/2"D

Powell Series

DELIVERED LUMENS PER WATT


2700K = 803000K = 90

3500K = 1004100K = 110

5000K = 120

ORDERING INFORMATION

Sample Number: POW-W-24W-AB-WF

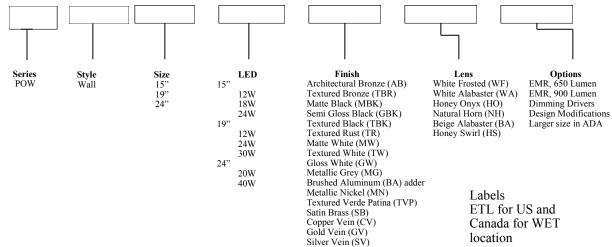

Chrome (CH)

Evergreen Lighting www.evergreenlighting.com